


Change for the better

**UTIER**  
**POWER**

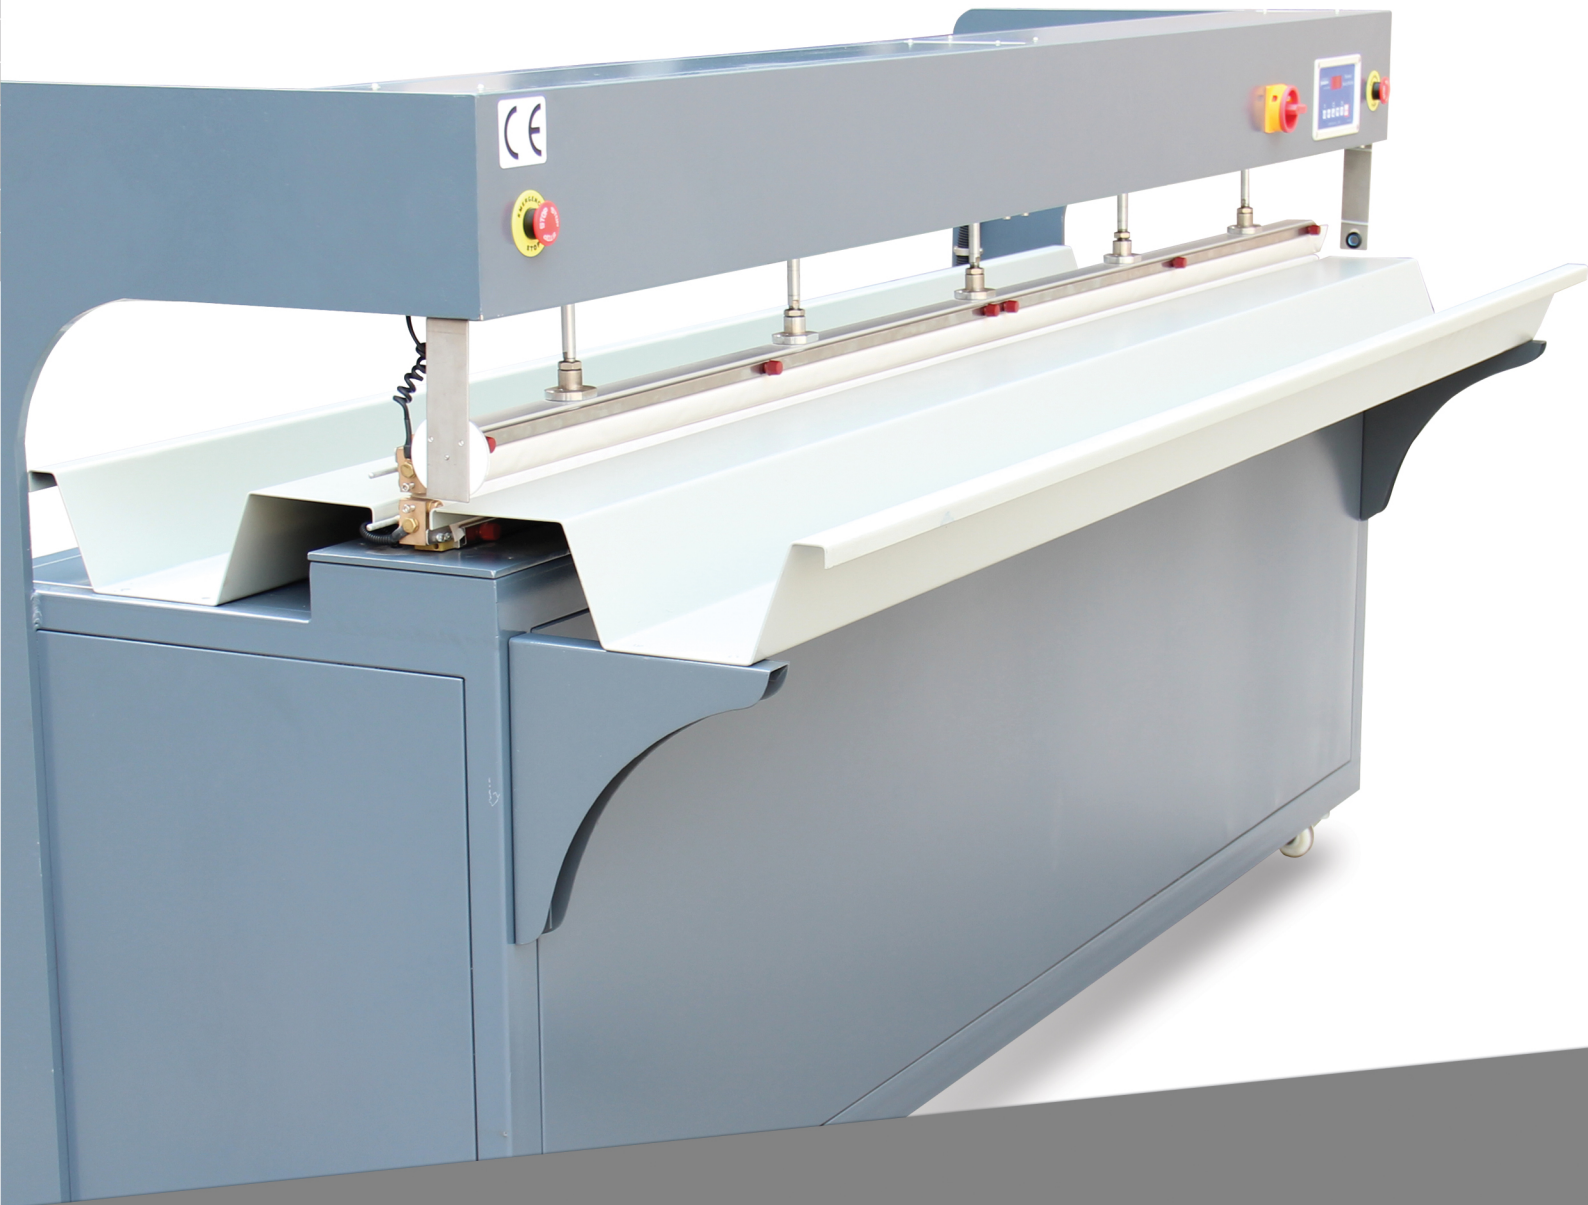

*FMQP-2500/2*

Banner welder



Machine with extension table

## Optional Parts

### *Extension table*

4 pieces in 1 set. Intend to hold the banner which ensures that the two end of the welding is smooth and can slide to the next weld.

### *New measurement system*

A block piece help placing the banner

### *Tape roller support with self brake*

Suitable for overlap weld with tape on one side.

### *Kedar holder*

Hold the kedar to ensure the precise weld with no deflection.

### *Laser light*

Mark on the welding bar to show the position where the banner should be.

### *Piston holder*

A holding bar with piston pressure which hold the position of the banner incase that it moves before welding.




### *Control Panel*

9 memory program can meet the need for different material or thickness welding. PCB digital control with display is very easy to operate.

### *Standard Features*

- Digital control
- Automatic heat/sealing settings
- 9 memory programs
- Uniform pressure & sealing
- Precise fabric welding
- Efficient & easy operation
- Maximum comfortable design
- Automatic stop safety features
- Thermo impulse welding technology
- Safety features CE approved



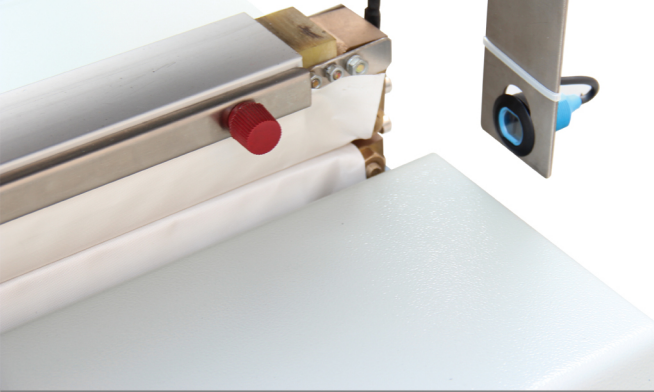

## Safety Sensor


Infrared ray sensor protect hands and fingers from being jammed. with secondary protection of two stage of sealing makes the process more safe.

## How to modify

There are two items of parameter  
One is sealing time and other is cooling time.

Sealing time:the major parameter for the seal. According to different thickness and material customer use, the sealing time shall be modified to assure the seal. After the banner was sealed it will be strong enough to hold the stress of natural wind or other environmental change.

Cooling time:cooling time modification makes difference to the sealing effect. Usually we can set the cooling time twice of the sealing time to make sure the seal flat and smooth.

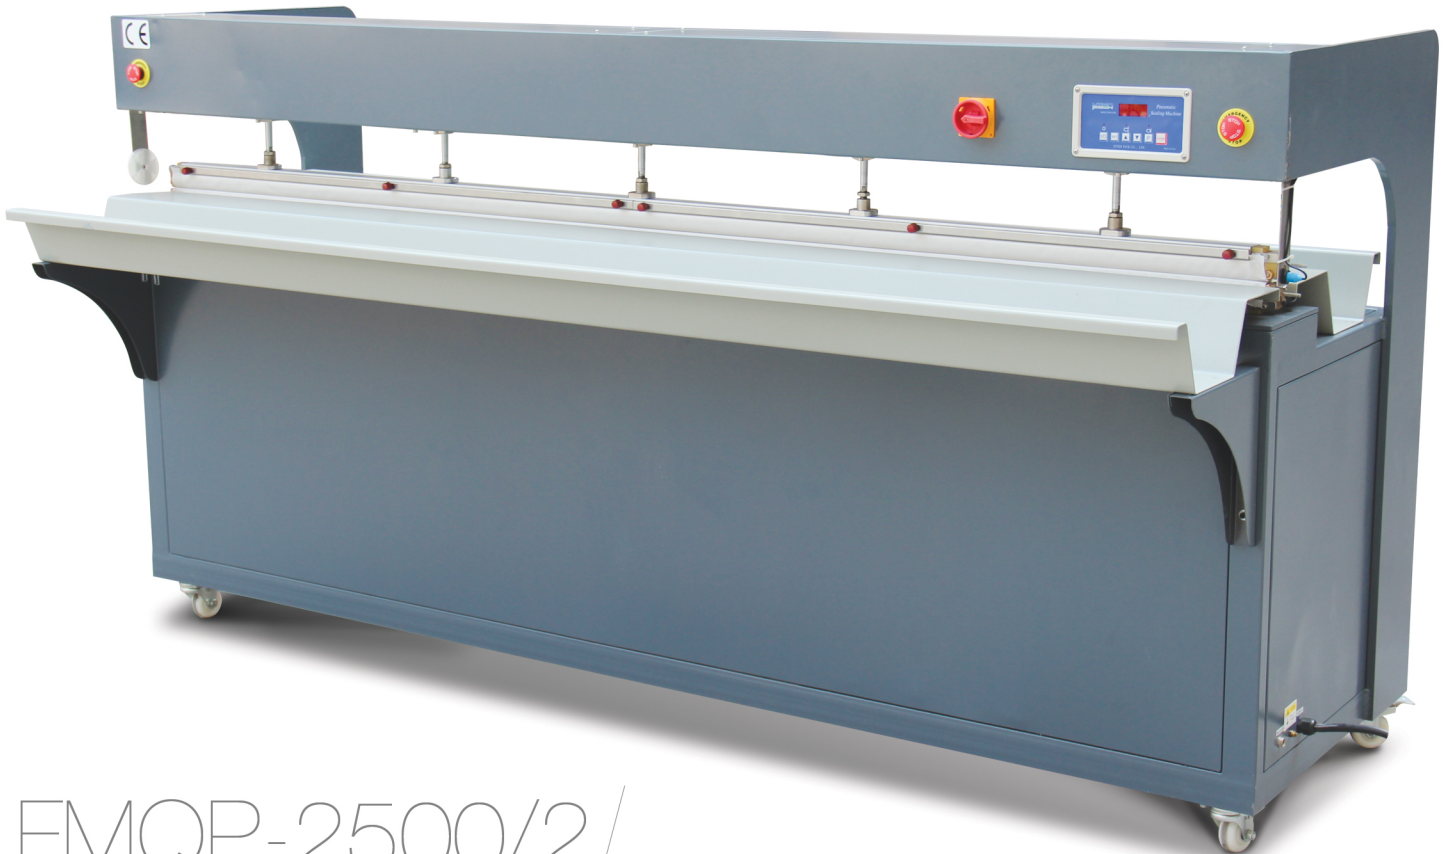

FMQP-2500/2

Banner welder

# Parameter

Model	FMQP-1200/2	FMQP-2500/2	FMQP-3000/2	FMQP-4000/2	FMQP-5000/2
Power	2.5KW	5KW	6KW	8KW	10KW
Voltage	220V,50Hz	220V,50Hz	1 or 3 Phase	3 Phase	3 Phase
Air Source	0.6MPa	0.6MPa	0.6MPa	0.6MPa	0.6MPa
Sealing Length	1200mm	2500mm	3000mm	4000mm	5000mm
Sealing Width	25mm	25mm	25mm	25mm	25mm
Size	1390×1120×1250 mm	2700×1120×1250 mm	3200×1120×1250 mm	4190×1120×1250 mm	5190×1120×1250 mm
Weight	360KG	620KG	700KG	860KG	1020KGa

## Welding Type



*Overlap weld*



*Overlap weld with  
tape on one side*



*Butt weld with tape  
on double sides*



*Hem*



*Hem with pocket*



*Kedar weld*

# UTIER

Utien Pack Co., Ltd  
 255 Shuguang Rd,  
 Kebei Industrial Zone,  
 Shaoxing, Zhejiang 312081,  
 China  
 Tel:+86 575 8110 7017  
 Fax:+86 575 8110 7023  
 Web:www.utien.com  
 e-mail:export@utien.com

